Skidplate Installation Instructions

1. If using you purchased a linkage guard model, assemble the linkage spring to the skid plate using hardware **(C)** and **(D).**
2. Use hardware **(B)** and **(E)** to loosely attach the small metal brackets.
3. Position the mounting bar in the frame of the motorcycle (see separate instructions below).
4. With the small brackets rotated backwards, (shown in Figure 2), position the skidplate against the frame of the motorcycle and rotate the small brackets 90 to latch over the frame.
5. Use bolts **(A)** and the washers to attach the plate to the mounting bar.
6. Torque all of the hardware.

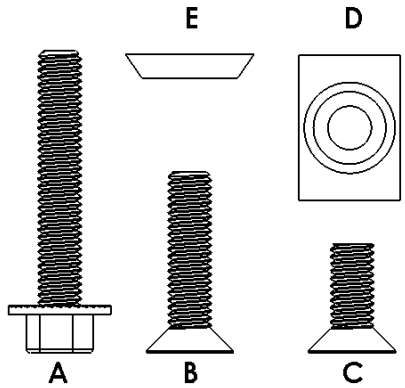

Figure 1 – Assemble Skidplate

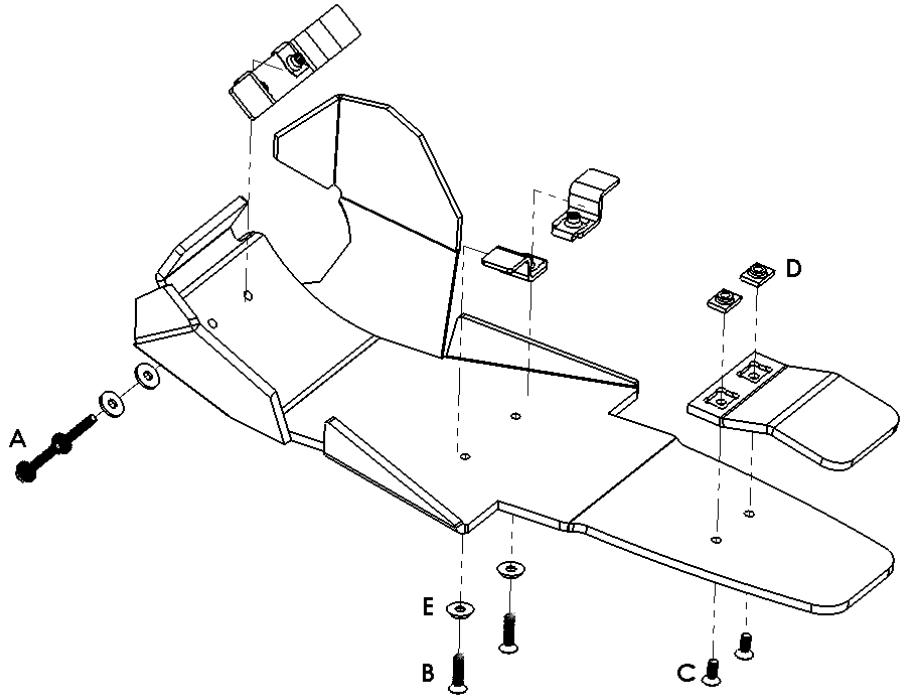

Figure 2 - Mounting Bar

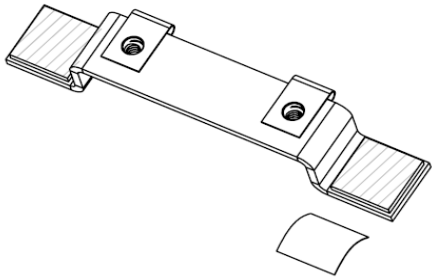

*The mounting bar comes with double-sided adhesive tape to **make future oil changes a breeze**. The **motorcycle frame must be cleaned thoroughly for the tape to stick**.*

- Position the mounting bar in the frame and then mount the rear of the skidplate to the bike (steps 1 -5). **Mark the desired position for the mounting bar before removing the tape liner**.

Remove the skidplate and mounting bar. Remove the liner from the adhesive tape and **stick the mounting bar to the frame in the marked location**. This tape requires pressure; use some force.

Figure 3 – Install Plate onto Bike

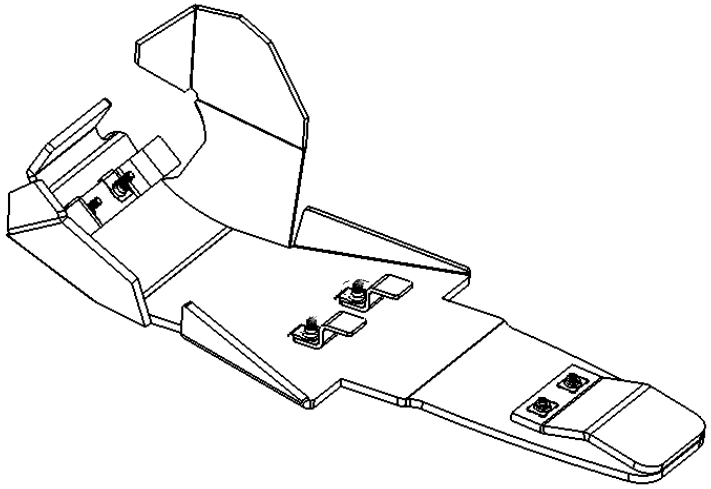

Molecule Motosports will not be responsible for any damages, loss of revenue, and/or personal injury caused or resulting from the installation of these parts or modifications made during installation.